

CARPULLER WINCH LAYOUTS



MOUNTED OFF SIDE Rail Car (load) -# of cars & travel required will calculate wire length and sheave positioning No.6 No.5 Double Car Hook (scale exaggerated for illustration) No.2 No.3 Single Sheave Single Sheave Block No.1 Block No.4 Fleet angle distance WIRE #1 both sides Car Puller Winch _____ WIRE #2 f de la companya de l wire rope leaves drum in same direction

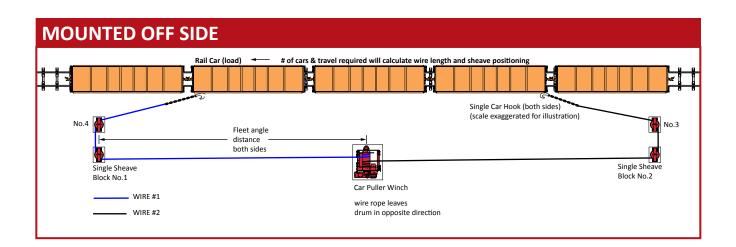

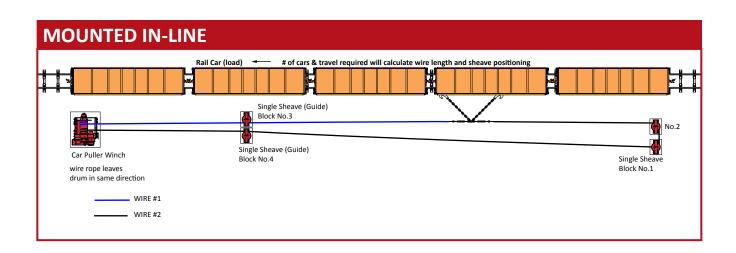

Product details and specifications are subject to change without notice. This catalog and all its contents is for informational purposes only.

<u>CarPuller.com</u>